


Width-of-Fabric Strip Quilt

Basic Sewing Instructions

1. Read through all the instructions with your kit. Identify fabrics and their placement according to the “pattern” provided.
2. Trim fabric strips to the same length.
3. Following the sewing and layout instructions, sew strips together using a $\frac{1}{4}$ inch seam allowance, keeping the ends of strips as even as possible. As successive strips are sewn, begin stitching on the opposite end of the strips to prevent finished quilt top from “bowing.”
4. Press seam allowances.
5. Continue piecing, alternating the starting ends, until all strips are sewn.
6. If you plan to finish the quilt yourself:
 - Use a rotary cutter and ruler to trim selvage edges evenly along sides.
 - Sandwich quilt top with batting and backing.
 - Quilt and bind.

Quick and easy quilts – using width of fabric (WOF) 64x52

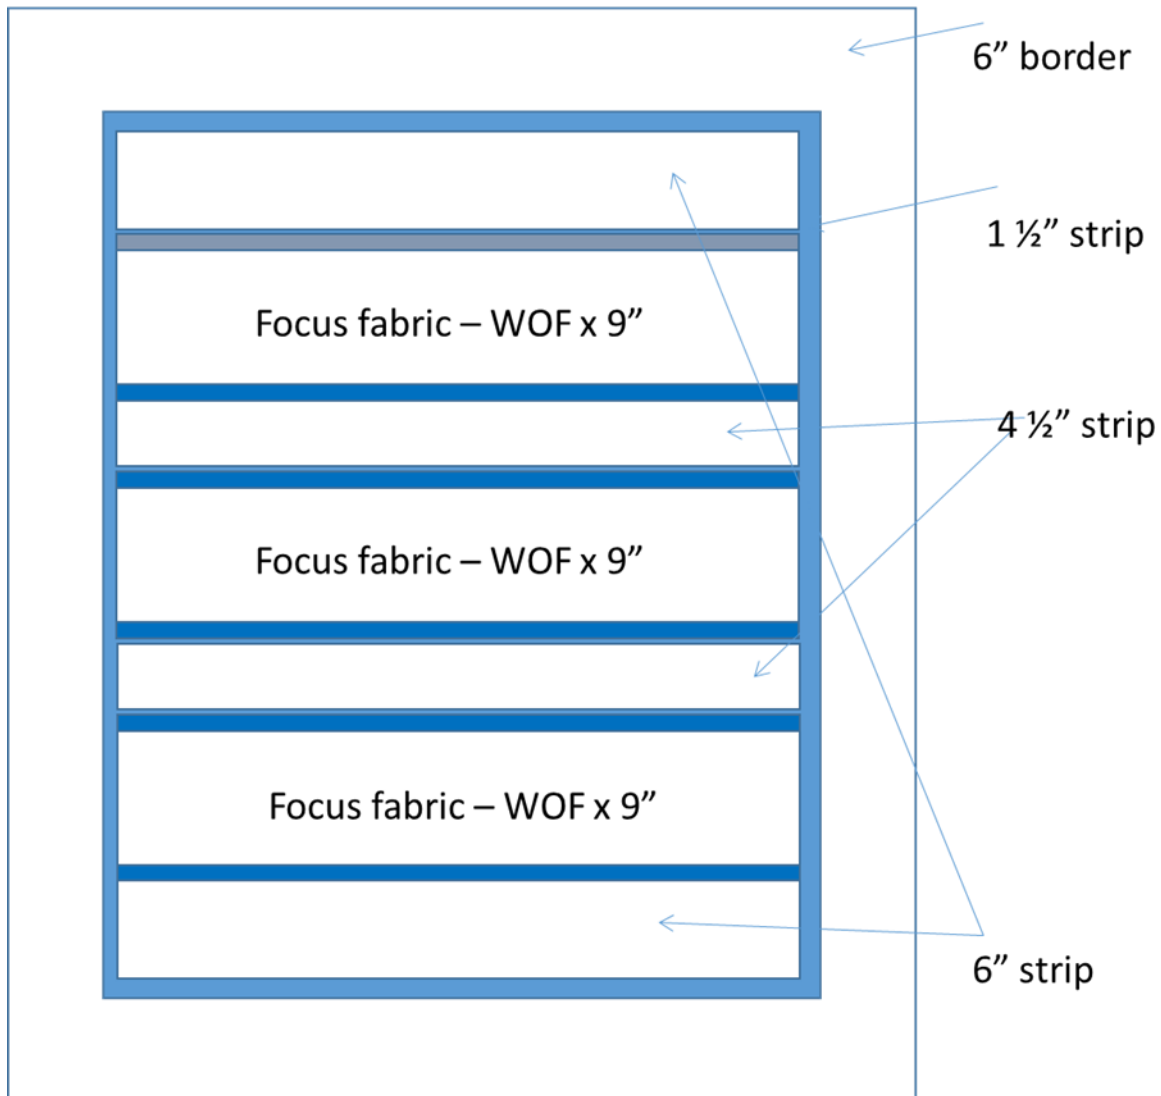

Cut the following

focus fabric – three strips WOF x 9"

Secondary focus fabric – two strips WOF x 4 1/2"

Another fabric – two strips WOF x 6"

Thin strips – cut 12 WOF x 1 1/2"

Border – cut 6 WOF x 6"

Can modify based on available fabric